


DOT-DASH[®] SIGNAGE / INSTALLATION

TOP OF PANEL MOUNT - ALLSTEEL CONCENSYS

The mounting bracket installs on the top of the panel. A #8 x 1/2 flat head screw (included) can be used to secure the bracket to the panel. This screw should be tightened into the top edge of the panel facing.

The back half of the dot is attached to the bracket with a #8-32 x 5/8" flat head screw. A 3/32" allen wrench (provided) is required to loosen or tighten the screw. By rotating the dot with this screw loose, plaque can be positioned as shown:

TOP OF PANEL

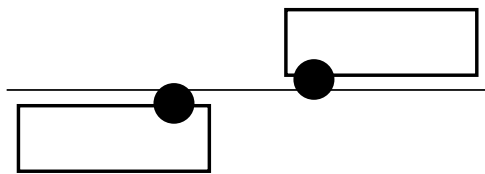

The screw holding the back half of the dot to the bracket **must be firmly tightened** to hold the dot and the plaque in desired position.

Hold plaque against shoulder of dot and turn cap and washer tightly against plaque (rubber side of washer against plaque).

