


Appenx

DOT-DASH[®] SIGNAGE / INSTALLATION DOT SOCK

The Dot Sock accessory snaps over the dot cap and rotates independent of the cap for the traffic signal function or graphic alignment.

The Dot Sock should be snapped over the dot cap **AFTER** the plaque is inserted and tightened into the dot. Push the Dot Sock back on the cap until the back edge of the sock lines up with the back edge of the cap.

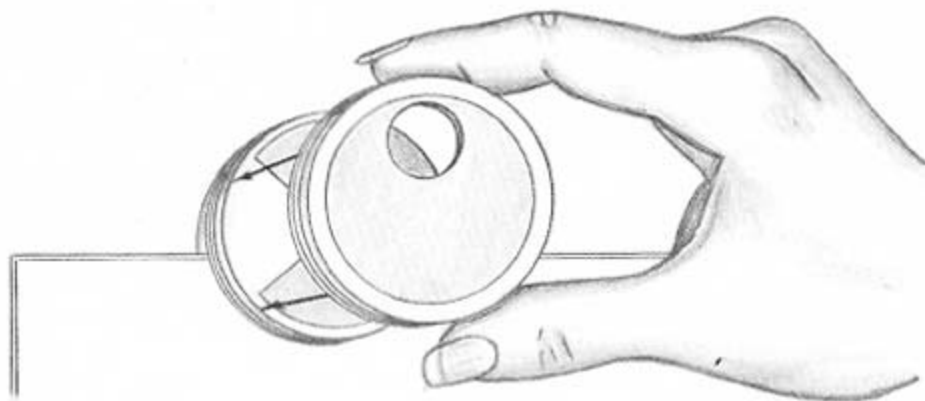

TO CHANGE THE PLAQUE/ REMOVE DOT SOCK: The Dot Sock has been designed to fit the dot cap tightly enough to function but still be easily removed by simply pulling the sock forward and off the cap. If not, use the following step procedure. If possible remove complete dot assembly (with bracket) or otherwise hold the back half of dot when removing sock. The Dot Sock has three points that contact the second indenture of the dot cap. While holding back half of dot, push edge of Dot Sock forward at any point (1) to the first indenture. At a point 1/3 around sock (2) push edge of sock forward again to the first indenture. At a point 1/3 further around (3) push edge forward like the previous two times. Repeat this procedure (if necessary) to remove Dot Sock from dot cap.

