


DOT-DASH[®] SIGNAGE / INSTALLATION TOP OF PANEL MOUNT - HAWORTH RACE

The bracket tape mounts to the underside of the top rail on either side of the panel. The panel tile must be removed to secure the bracket to the top rail.

The top rail and tile can be removed by turning the plug using a 3/8" hex wrench

The back half of the dot is attached to the bracket with a #8-32 x 5/8" flat head screw. A 3/32" allen wrench (provided) is required to loosen or tighten the screw. By rotating the dot with this screw loose, plaque can be positioned as shown:

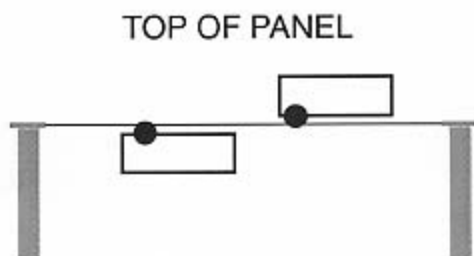

The screw holding the back half of the dot to the bracket **must be firmly tightened** to hold the dot and the plaque in desired position.

Hold plaque against shoulder of dot and turn cap and washer tightly against plaque (rubber side of washer against plaque).

