


DOT-DASH[®] SIGNAGE / INSTALLATION TOP/SIDE OF PANEL MOUNT - KNOLL MORRISON


The mounting bracket installs on either the side or the top of the panel. A #8 x 1/2 flat head screw (included) is used to secure the bracket to the panel. This screw should be tightened into the fabric trough and flush to the face of the bracket. As the screw is tightened keep it as straight as possible to assure a flush fit.

The back half of the dot is attached to the bracket with a #8-32 x 5/8" flat head screw. A 3/32" allen wrench (provided) is required to loosen or tighten the screw. By rotating the dot with this screw loose, plaque can be positioned as shown:


LEFT SIDE OF PANEL

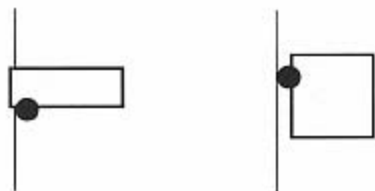

RIGHT SIDE OF PANEL

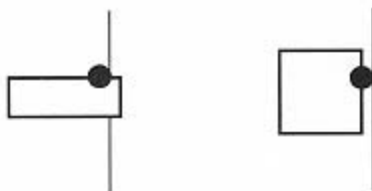

TOP OF PANEL

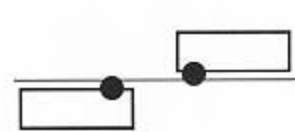

The screw holding the back half of the dot to the bracket **must be firmly tightened** to hold the dot and the plaque in desired position.

Hold plaque against shoulder of dot and turn cap and washer tightly against plaque (rubber side of washer against plaque).

