

## DOT-DASH<sup>®</sup> SIGNAGE / INSTALLATION SIDE-OF-PANEL MOUNT - HERMAN MILLER AO 1 & 2


Bracket clips into the slots of the panel hanger frame. Bracket fits best at the end of a panel run to bump against the end cap, but can be used between panels.

Because the distance between the hanger frame and the end cap may vary from one panel to another, two different clear plastic spacers are provided. Attach the appropriate spacer directly behind stud to assure plaque is parallel to panel surface. Spacers also protect fabric surfaces and make up the difference between fabric and hard face panel surfaces.


INSTALLATION NOTE: If bracket installation is too tight, loosen end cap for best fit.

Back half of dot is attached to bracket with a #8-32 x 5/8" flat head cap screw. A 3/32" allen wrench, (provided), is required to loosen or tighten screw. By rotating dot with this screw loose, plaque can be positioned as shown:

LEFT SIDE OF PANEL

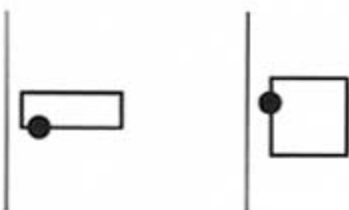

RIGHT SIDE OF PANEL

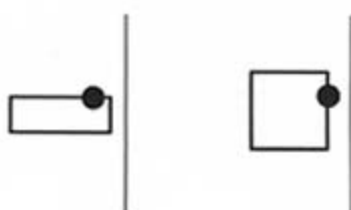

Screw holding back half of dot to bracket **must be firmly tightened** to hold dot and plaque in desired position.

Hold plaque against shoulder of dot and turn cap and washer tightly against plaque, (rubber side of washer against the plaque).

