

## DOT-DASH<sup>®</sup> SIGNAGE / INSTALLATION TOP-OF-PANEL MOUNT - HERMAN MILLER AO3

The metal bracket is designed to attach to the side of the wire management trough at the top of a Herman Miller Action Office 3 panel.

Snap top cap off.



Remove protective adhesive cover from the front of the bracket, position bracket on the lip of the trough and swing bottom adhesive portion of bracket onto the side of the trough. Press firmly on the entire surface of the bracket.

The back half of the dot is attached to the bracket with a #8-32 x 5/8" flat head screw. A 3/32" allen wrench (provided) is required to loosen or tighten the screw. NOTE: by rotating the dot with this screw loose the plaque can be positioned above or below the dot as shown.



The screw holding the back half of the dot to the bracket **must be firmly tightened** to hold the dot and the plaque in desired position.

Hold plaque against shoulder of dot and turn cap and washer tightly against plaque, (rubber side of washer against plaque).

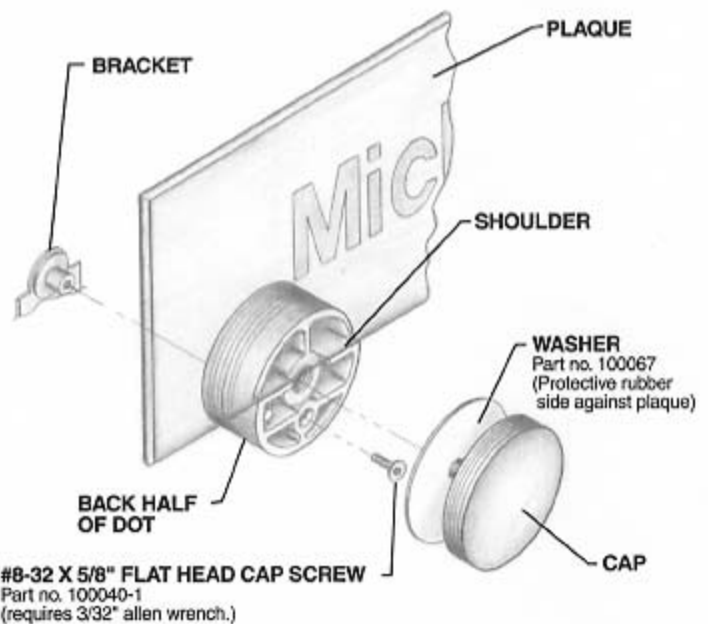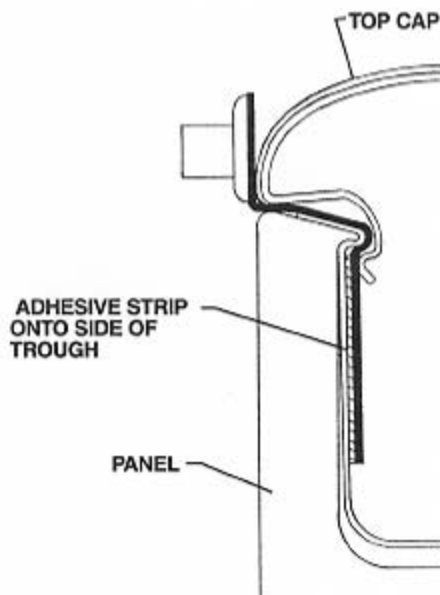

IMPORTANT: Screw must be firmly tightened to hold Dot and Plaque in desired position.