

DOT-DASH[®] SIGNAGE / INSTALLATION HARD SURFACE, DOOR MOUNT

Door or Smooth Wall surface should be cleaned with a solution of isopropyl alcohol and water.


Mark the spot for hard surface bracket, keeping in mind the plaque placement:

Plaque above the dot, stud at 6:00 position.

Plaque below the dot, stud at 12:00 position.

Remove back half of dot from metal bracket by removing #8-32 x 5/8" screw using a 3/32" allen wrench (provided). The adhesive surface on the back side of the bracket will securely bond to most smooth surfaces.

Remove protective adhesive cover from the back, position the bracket and press firmly on the door/wall surface. **Allow a minimum of 24 hours for adhesive to set.**

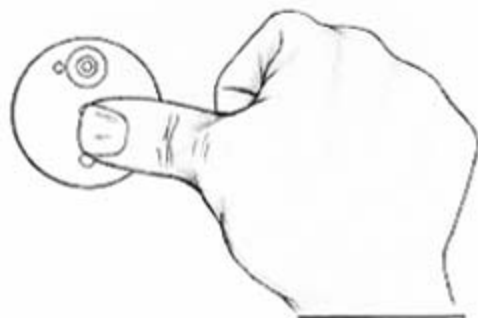

ALTERNATE MEANS OF ATTACHING:

Wood Surface – Recommend using two wood screws, (provided), to secure the bracket.

Glass Surface – Press firmly on both sides of glass if possible until 90% of the adhesive surface contacts glass as seen from back side. Remove backing from black vinyl cover and apply to the back side of glass, aligning it with bracket.

Dry Wall & Brick – Recommend using two plastic anchors set into the dry wall or brick and the two wood screws, (provided), to secure the bracket.

Attach the back half of the dot to bracket with #8-32 x 5/8" flat head cap screw. This screw **must be firmly tightened** to hold the dot and plaque in the desired position.

Hold the plaque against shoulder of the dot and turn cap and washer tightly against plaque. (Rubber side of washer against plaque).

NOTE: Plaque mounted above dot shown, (stud in 6:00 position).
For plaque below dot, apply hard surface bracket with stud in 12:00 position.

