


DOT-DASH[®] SIGNAGE / INSTALLATION TOP-OF PANEL MOUNT - HERMAN MILLER AO 1 & 2

The clear plastic bracket is designed to snap over a Herman Miller Action Office Series 1 & 2 panel top cap. The locating pin on the back half of the dot inserts into one of the two holes in the face of the bracket to register the dot and the plaque in the up or down position.

The back half of the dot is attached to the bracket with a flat head cap screw. A 3/32" allen wrench (provided) is required to loosen or tighten screw. **NOTE:** Plaque can be positioned above or below the dot by removing the screw and rotating the dot 180° as shown; **failure to remove the screw to reposition dot will cause damage to the mount.**

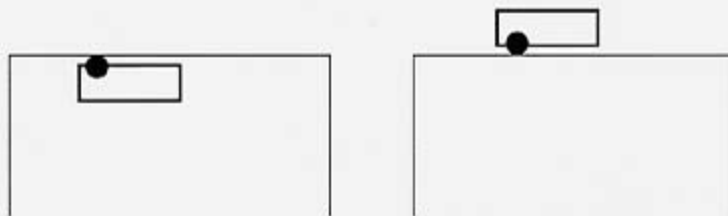

The screw holding the back half of the dot to the bracket **must be tightened** to hold the dot and the plaque in the desired position.

Before snapping the mount on the panel, install the plaque against the shoulder of the dot and turn the cap and washer tightly against plaque (rubber side of the washer against plaque). It is recommended that the mount be removed from the panel to remove or replace the plaque.

